

ONE-CLICK DRAWER SLIDES


LDSCU-3D SET-UP GUIDE

3-Way Adjustment Soft-Close Undermount Drawer Slides

ROUTING DETAILS


- ➔ Plunge Cut: Z: -4.5mm, Slot Cut X: 0 to 27mm
- ➔ Plunge Cut: Z: -9.0mm, Slot Cut X: -23 to 27mm

Route Green first, then Gray.
(Allowable depth range is -9.0 to -9.3)

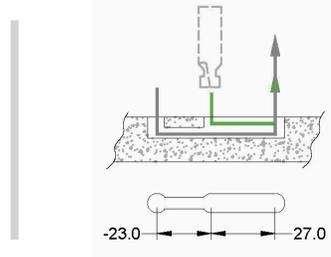


T-SLOT & PIN MACHINING LOCATIONS


For new 250mm/10" Undermount Slides

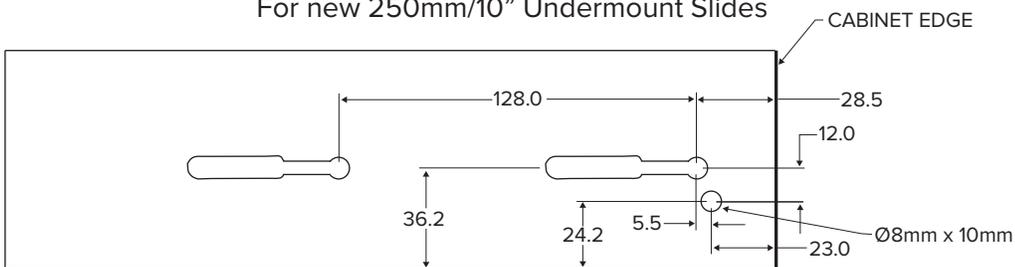


For new 300mm/12" to 450mm/18" Undermount Slides

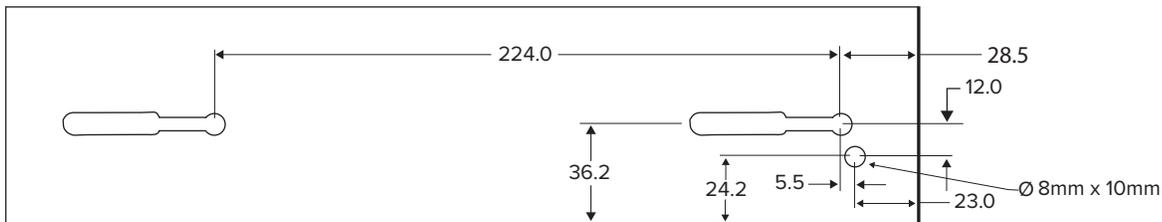

For new 500mm/20" Undermount Slides

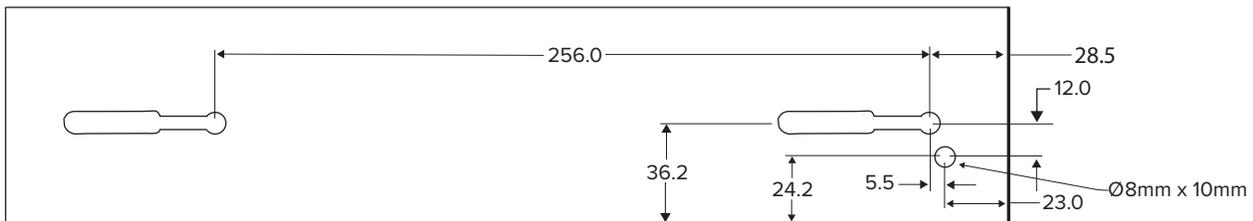


For new 550mm/22" Undermount Slides

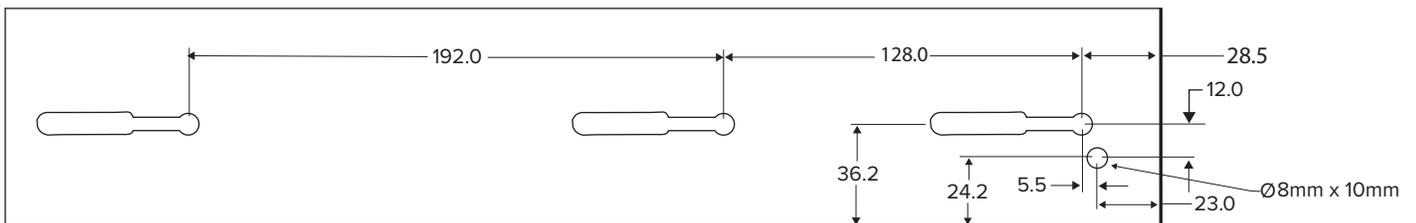

ONE-CLICK DRAWER SLIDES


LDSCU-3D SET-UP GUIDE

TO DETERMINE DRAWER BOX WIDTH:

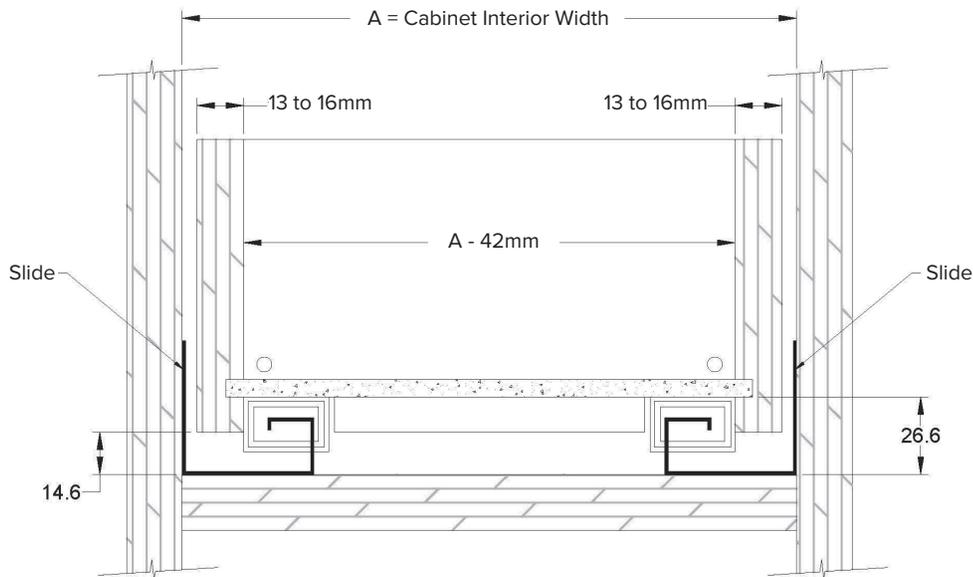

Drawer Slide	DRAWER BOX LENGTH			
	5/8" thick drawer boxes		1/2" thick drawer boxes	
	INCH	MM	INCH	MM
LDSCU-3D-10	10 7/8	276.0	10 3/4	273.0
LDSCU-3D-12	12 13/16	326.0	12 11/16	323.0
LDSCU-3D-14	14 3/4	375.0	14 5/8	372.0
LDSCU-3D-16	16 3/4	426.0	16 5/8	422.0
LDSCU-3D-18	18 3/4	476.0	18 5/8	473.0
LDSCU-3D-20	20 11/16	526.0	20 9/16	523.0
LDSCU-3D-22	22 11/16	576.0	22 9/16	573.0

DRAWER BOX REAR PANEL:

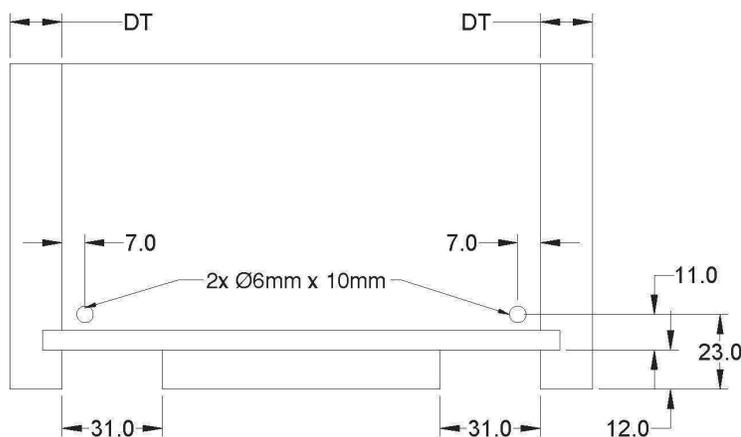

A silent, soft-closing system with 3-Way adjustment that is suitable for all drawer applications. It uses Lockdowel's patented fasteners and offers excellent stability.

SPECIFICATIONS

- Load Rating: 45kg
- Full extension
- Extremely fast assembly
- More than 50,000 cycles test time
- 3-way adjustable clip (metal)
- ANSI & BIFMA tested and approved