



ONE-CLICK


SNAP-ON DRAWER SLIDES



Featuring the company's signature E-clips fastening technology, snap-on drawer slides enable complete, tool-less installation.

Tool-less green barbs utilize pre-drilled 8mm holes in the side panels of the drawer box. They go all the way through, beneath the dado, making them invisible after installation. Simply line up the slide and barbs with the holes, and press down. No screwing is required.

Upon adding the drawer to the cabinet, pre-installed channel-lock hardware allows the slide to drop into slots on the edge panels.

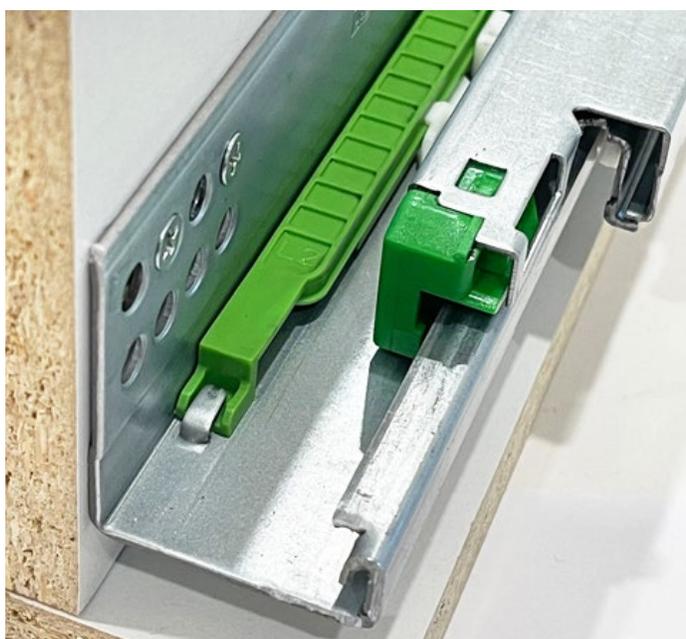

ADVANTAGES & BENEFITS

- Load Rating: 100 lb (45 kg)
- Full extension
- Extremely fast assembly
- More than 50,000 cycles test time
- Technical information available in the integration software libraries

No.	Length
Standard ball bearing slides with soft-close	
LDMSMC-45-10	10" (250 mm)
LDMSMC-45-12	12" (300 mm)
LDMSMC-45-14	14" (350 mm)
LDMSMC-45-16	16" (400 mm)
LDMSMC-45-18	18" (450 mm)
LDMSMC-45-20	20" (500 mm)
LDMSMC-45-22	22" (550 mm)
Standard ball bearing slides	
LDSM3P-25-10	10" (250 mm)
LDSM3P-25-12	12" (300 mm)
LDSM3P-25-14	14" (350 mm)
LDSM3P-25-16	16" (400 mm)
LDSM3P-25-18	18" (450 mm)
LDSM3P-25-20	20" (500 mm)
LDSM3P-25-22	22" (550 mm)
Undermount drawer slides with soft-close	
LDSCU-3D-10	10" (250 mm)
LDSCU-3D-12	12" (300 mm)
LDSCU-3D-14	14" (350 mm)
LDSCU-3D-16	16" (400 mm)
LDSCU-3D-18	18" (450 mm)
LDSCU-3D-20	20" (500 mm)
LDSCU-3D-22	22" (550 mm)

ONE-CLICK front locking devices for undermount drawer slides

Adjustment direction:
6 directions

No. LD-CLIP

